

Technical Data Sheet

CODE 11532

QE 60 LL TP

Centrifugal duct fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Voltage (V)	220-240
Insulation Class	II°	Weight (Kg)	2,33
IP	45	Max delivery at max speed (l/s)	16,7
Max ambient temperature for continuous operation (°C)	50	Max delivery at max speed (m³/h)	60
Max. absorbed Current at max. speed (A)	0,14	Pressure max - max speed (mmH2O)	35
Max. absorbed power at max speed (W)	16	Pressure max - max speed (Pa)	343
Nominal Diameter (mm)	80	RPM max	1170
Ø Discharge Hole (mm)	70	Sound power Lw [dB(A)] - max speed	45,5
		Sound pressure level Lp [dB (A)] 3m - max speed	25

DIMENSIONS

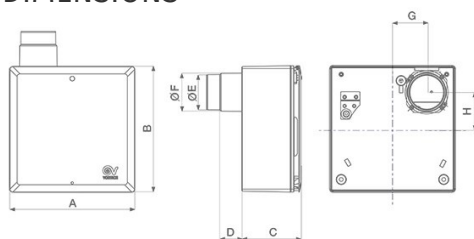

Size A (mm)	262
Size B (mm)	262
Size C (mm)	115,5
Size D (mm)	80
Size E (mm)	73
Size F (mm)	79
Size G (mm)	71,5
Size H (mm)	90

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11532

QE 60 LL TP

Centrifugal duct fans



DESCRIPTION


- Scroll and front panel made of self-extinguishing ABS, rated V0.
- Motor housing and filter frame made of ABS plastic.
- 1 speed AC motor, shaft on ball bearings, coupled to a forward curved centrifugal impeller, PBT made.
- Nominal airflow: 60 m³/h
- G2 filter, with a clogged filter mechanic alarm fully compliant with ErP reg. N° 1253/2014/UE, in force since 1st January 2018.
- The switching on/off of the extractor fan is realized through the light control; the on-board electronic allows to set, during the installation,

the starting/stopping delay when the product is switched on/off (the respective delays can be set at 0, 45, 90 or 120 seconds and at 6, 10, 15 or 21 minutes).

To ensure a proper ventilation of the room, even for extended inactivity periods, is possible to set (HOLIDAY function), every 8, 12 or 24 hours, a periodic running operation cycle (time settable at 6, 10, 15 or 21 minutes).

- TUV Certification.

CURVES

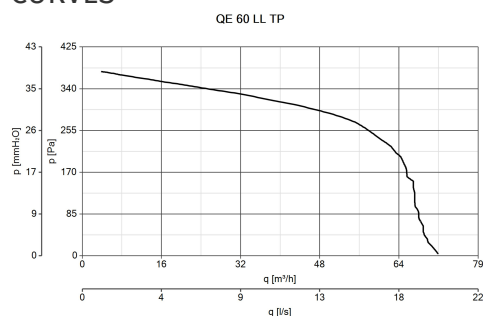

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com