

Technical Data Sheet

CODE 30325

C 30/2 M E

Centrifugal fans



Certifications



CE




EAC

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	3,2	Voltage (V)	230
Absorbed Power max (W)	740	Weight (Kg)	8,4
Frequency (Hz)	50	Delivery max (l/s)	394.4
Insulation Class	I°	Delivery max (m³/h)	1420
Max ambient temperature for continuous operation (°C)	50	Pressure max (mmH2O)	84
Motor IP protection	55	Pressure max (Pa)	824
Number of Phases (Ph)	1	RPM	2800
Number of Poles	2	Sound Pressure level Lp [dB (A)] 3m	71

DIMENSIONS

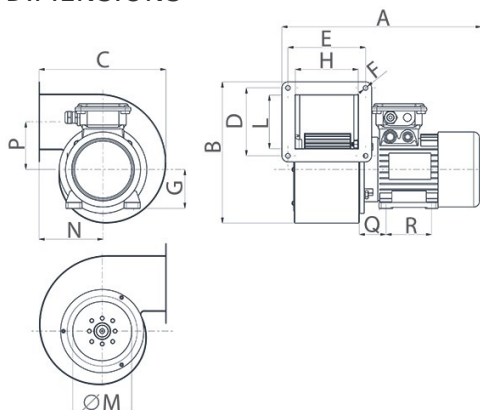

Dimensione Q (mm)	45
Dimensione R (mm)	90
Size A (mm)	366
Size B (mm)	308
Size C (mm)	272
Size D (mm)	126
Size E (mm)	137
Size F (mm)	8,5
Size G (mm)	71
Size H (mm)	117
Size L (mm)	108
Size M (mm)	Ø 132
Size N (mm)	131
Size P (mm)	111

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 30325

C 30/2 M E


Centrifugal fans




DESCRIPTION

- Frame and scroll: painted pressed steel, with multiple fixing holes configured to allow alignment of the motor in 8 different positions relative to the outlet port.
- Single phase AC motor with 1 operating speed and shaft turning in ball bearings.
- Centrifugal impeller with forward-curved blades of zinc-coated steel, dynamically balanced (UNI ISO 1940, Point 1 – Class 6.3).
- Maximum air flow: 1420 m³/h.

CURVES

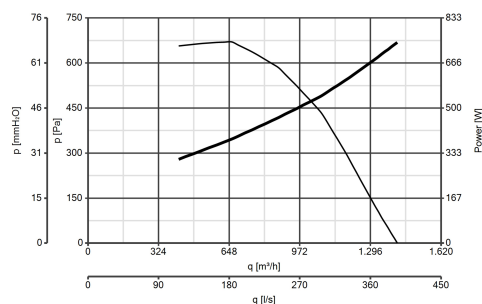


ACCESSORIES




C-MS 30 (SUPPORTO MOTORE)

Code 22837



C-RA 30 (RACCORDO DI ASPIRAZIONE)

Code 22829



C-GM 30 (GRIGLIA PROT.MANDATA)

Code 22816



C-GA 30 (GRIGLIA PROT.ASPIRAZIONE)

Code 22804



IREM INVERTER 4 M

Code 12815

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com