

Technical Data Sheet

CODE 11965

ARIETT LL

Centrifugal duct fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,14	Ø Discharge Hole (mm)	97
Absorbed Power max (W)	18	Voltage (V)	230
Frequency (Hz)	50	Weight (Kg)	1,47
Insulation Class	II°	Delivery max (l/s)	19,4
IP	X4	Delivery max (m³/h)	70
Max ambient temperature for continuous operation (°C)	40	Pressure max (mmH2O)	12
Max. absorbed power at max speed (W)	18	Pressure max (Pa)	118
Nominal Diameter (mm)	100	RPM	2315
		Sound Pressure level Lp [dB (A)] 3m	40

DIMENSIONS

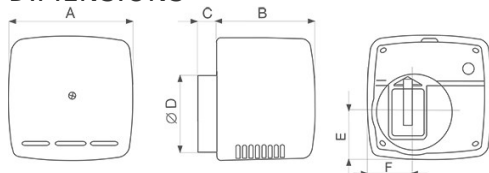

Size A (mm)	156
Size B (mm)	123
Size C (mm)	25
Size D (mm)	Ø 97
Size E (mm)	60
Size F (mm)	60

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11965

ARIETT LL


Centrifugal duct fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter: 100 mm
- Motor with thermal overload protection and shaft turning in ball bearings.
- Maximum air flow 70 m³/h
- Non-return damper fitted to outlet port.
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controller.

CURVES

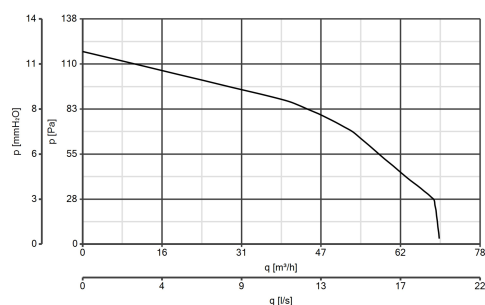

ACCESSORIES



SCNRB
SCAT.COM.NON
REV.INCASSO

Code 12971



DEVIATORE DI
FLUSSO M 10/4

Code 22310



KIT SCB
(TRASF.E.C.)

Code 22481



C 1.5
(COMANDO EL.
1.5 A)

Code 12966

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com