

# Technical Data Sheet

CODE 12455

## VORTICE 230/9" AR-LL-S

Wall/window axial fans



### Certifications



IMQ



CE



IMQ Performance



C Tick Mark



EAC




G-Mark

### TECHNICAL AND PERFORMANCE DATA

|                                                            |            |
|------------------------------------------------------------|------------|
| Absorbed Current max (A)                                   | 0,19       |
| Absorbed Power max (W)                                     | 35         |
| Frequency (Hz)                                             | 50/60      |
| Inlet                                                      | Automatico |
| Insulation Class                                           | II°        |
| IP                                                         | X4         |
| Max absorbed Power at 60Hz (W)                             | 40         |
| Max ambient temperature for continuous operation (°C)      | 50         |
| Max ambient temperature for continuous operation 60Hz (°C) | 50         |
| Ø Discharge Hole (mm)                                      | 230        |

|                                     |         |
|-------------------------------------|---------|
| Voltage (V)                         | 220-240 |
| Weight (Kg)                         | 3,45    |
| Delivery max - Extract (l/s)        | 194,4   |
| Delivery max - Extract (m3/h)       | 700     |
| Delivery max - Intake (l/s)         | 102,8   |
| Delivery max - Intake (m3/h)        | 370     |
| Delivery max (m3/h)                 | 700     |
| RPM                                 | 1200    |
| Rpm - Exhaust                       | 1200    |
| Rpm - Supply                        | 1300    |
| Sound Pressure level Lp [dB (A)] 3m | 43,6    |

### DIMENSIONS

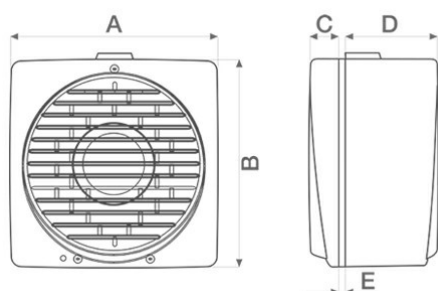

|              |         |
|--------------|---------|
| Ø glass hole | 257/262 |
| Ø wall hole  | 257/262 |
| Size A (mm)  | 294     |
| Size B (mm)  | 297     |
| Size C (mm)  | 31      |
| Size D (mm)  | 130     |
| Size E (mm)  | 2/38    |

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

# Technical Data Sheet

CODE 12455

## VORTICE 230/9" AR-LL-S


Wall/window axial fans




### DESCRIPTION

- Model designed for window/wall mounted installation.
- Reversibility function (intake or extraction).
- Automatic shutter: prevents the entry of cold air and bad smells when the appliance is switched off.
- Material: UV resistant ABS plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 230 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings, coupled to screw type thermoplastic impeller with wing profile blades.
- IMQ SAFETY and IMQ PERFORMANCE certifications.

### CURVES

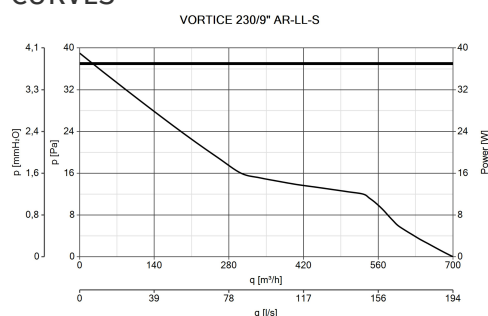

### ACCESSORIES



**KIT TE 230/9"**  
**(TORRETTA)**  
Code 13002



**KIT SA 230/9"**  
**(SCHERMO**  
**ANTILUCE)**  
Code 13004



**KIT MU (MURO)**  
Code 13018



**KIT VV 230/9"**  
**(DOPPI VETRI)**  
Code 13022

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)