

Technical Data Sheet

CODE 15045

TORRETTA TRT 20 ED 4P

Centrifugal roof fans with horizontal discharge for hot fumes extraction




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed power 1st speed (W)	208	Weight (Kg)	33
Frequency (Hz)	50	Delivery 1st speed (l/s)	500
Insulation Class	I°	Delivery 1st speed (m³/h)	1800
Max ambient temperature for continuous operation (°C)	90	Max delivery at max speed (l/s)	611
Max. absorbed Current at max. speed (A)	0,53	Max delivery at max speed (m³/h)	2200
Max. absorbed Current at min. speed (A)	0,32	Pressure - 1st speed (mmH2O)	24
Max. absorbed power at max speed (W)	270	Pressure - 1st speed (Pa)	235
Motor IP protection	55	Pressure max - max speed (mmH2O)	34
Nominal Diameter (mm)	250	Pressure max - max speed (Pa)	334
Number of Phases (Ph)	3	RPM max	1400
Number of Poles	4	RPM min	1050
Voltage (V)	380-415	Sound Pressure level Lp [dB (A)] 3m	68

DIMENSIONS

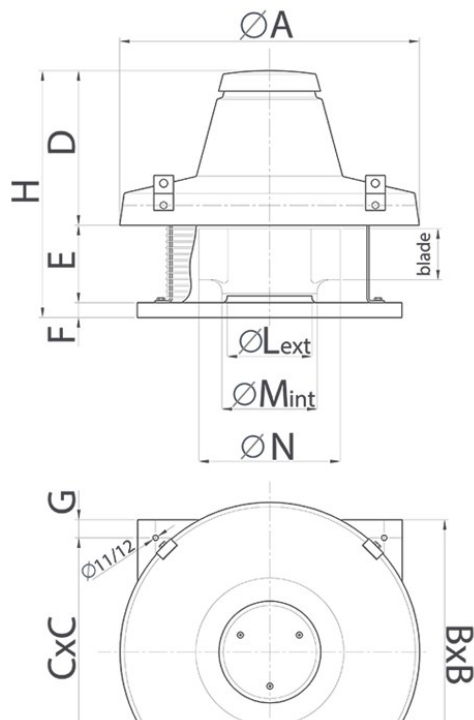

Size A (mm)	780
Size B (mm)	550
Size C (mm)	500
Size D (mm)	397
Size E (mm)	226
Size F (mm)	38
Size G (mm)	25
Size H (mm)	661
Size L (mm)	231
Size M (mm)	236,5
Size N (mm)	359

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 15045

TORRETTA TRT 20 ED 4P


Centrifugal roof fans with horizontal discharge for hot fumes extraction



DESCRIPTION

- Centrifugal roof fan suitable for extracting hot fumes at up to 400 °C for 120 minutes.
- Base manufactured from phosphated pressed steel, epoxy powder coated with hammered effect finish, guaranteeing long-term resistance to atmospheric agents.
- Aerodynamically contoured inlet port for optimum performance, fashioned as a single unit with the base and gauged to optimize air flow.
- Motor mounting plate made of steel with galvanization surface treatment.
- Pressed steel motor cover: pickled and phosphated surface, polyester powder coated and oven baked finish, colour grey, with hammered texture.
- Accident prevention and anti-bird grilles (to UNI ISO 13857 standard), consisting of electrically welded steel rings with epoxy powder coated finish, colour black.
- Centrifugal impeller with self-cleaning backward curved blades, dynamically balanced (UNI ISO 1940, Point 1 – Class 6.3), made of electrolytically galvanized pressed steel.
- Dahlander 2 speed three-phase AC motor with shaft turning in ball bearings, size to UNEL MEC standard, flange B5, self-ventilating. Motor insulation class H, with metal cooling fan and cable gland.
- Minimum air flow 1800 m³/h
Maximum air flow: 2200 m³/h.
- Equipped with a motor start capacitor that must be installed remotely from the fan so that it cannot be damaged through direct exposure to heat.
- Galvanized steel eye lugs for transport and lifting/handling operations.
- Cable guaranteeing continuity of earth connection.
- Steel safety wire for anchoring the appliance once installed.


CURVES

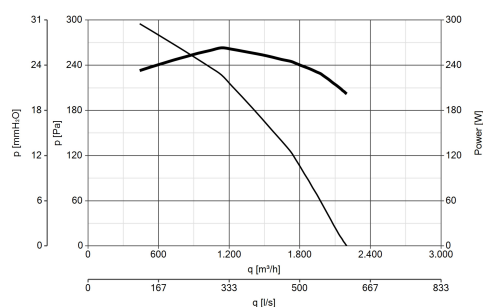


ACCESSORIES



IRT 15
Code 12923



**TR-CU
20/30/50
(CONTROTELAIO
DI BASE U)**
Code 22512



**TR-G 20/30/50
(GRIGLIA DI
PROTEZIONE)**
Code 22710



PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premando 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com

2 ME04
la 21113

VELOCITA'
TRIF.)
Code 22910

Code 12010

Code 21112

Code 21113