


Technical Data Sheet

CODE 15171

TORRETTA TRT 70 ED-V 4P

Centrifugal roof fans with vertical discharge for hot fumes extraction



CE




A⁺ APPLUS



TECHNICAL AND PERFORMANCE DATA

Absorbed power 1st speed (W)	900	Weight (Kg)	128
Frequency (Hz)	50	Delivery 1st speed (l/s)	1472
Insulation Class	1°	Delivery 1st speed (m³/h)	5300
Max ambient temperature for continuous operation (°C)	90	Max delivery at max speed (l/s)	1667
Max. absorbed Current at max. speed (A)	2,00	Max delivery at max speed (m³/h)	6000
Max. absorbed Current at min. speed (A)	1,50	Pressure - 1st speed (mmH2O)	52
Max. absorbed power at max speed (W)	1100	Pressure - 1st speed (Pa)	510
Motor IP protection	55	Pressure max - max speed (mmH2O)	67
Nominal Diameter (mm)	350	Pressure max - max speed (Pa)	657
Number of Phases (Ph)	3	RPM max	1400
Number of Poles	4	RPM min	1200
Voltage (V)	400	Sound Pressure level Lp [dB (A)] 3m	77

DIMENSIONS

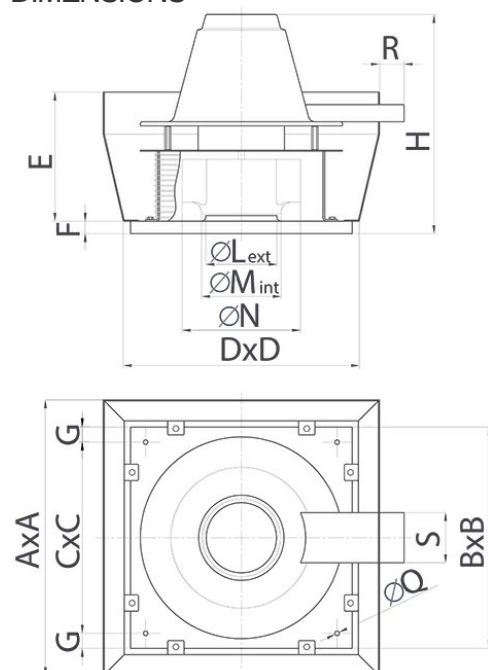

Dimensione Q (mm)	12
Dimensione R (mm)	50
Size A (mm)	1144
Size B (mm)	830
Size C (mm)	750
Size D (mm)	860
Size E (mm)	491
Size F (mm)	38
Size G (mm)	40
Size H (mm)	743
Size L (mm)	328
Size M (mm)	335
Size N (mm)	504

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 15171

TORRETTA TRT 70 ED-V 4P


Centrifugal roof fans with vertical discharge for hot fumes extraction





DESCRIPTION

- Centrifugal roof fan suitable for extracting hot fumes at up to 400 °C for 120 minutes.
- Base manufactured from phosphated pressed steel, epoxy powder coated.
- Aerodynamically contoured inlet port for optimum performance, fashioned as a single unit with the base and gauged to optimize air flow.
- Motor mounting plate made of steel with galvanization surface treatment.
- Protective cap carried by top plate made of steel with galvanization surface treatment.
- Cold outside air drawn into a cooling chamber made of pressed steel.
- Pressed steel motor cover: pickled and phosphated surface, polyester texture.
- Accident prevention and anti-bird grilles (to UNI ISO 13857 standard), consisting of electrically welded steel rings with epoxy powder coated.
- Centrifugal impeller with self-cleaning backward curved blades, dynamically balanced (UNI ISO 1940, Point 1 - Class 6.3), made of electrolytically galvanized steel.
- Dahlander 2 speed three-phase AC motor with shaft turning in ball bearings.
- Insulation class H, with metal cooling fan and cable gland.
- Galvanized steel eye lugs for transport and lifting/handling operations.
- Cable guaranteeing continuity of earth connection.
- Steel safety wire for anchoring appliances once installed.
- Vortice speed controller.

CURVES

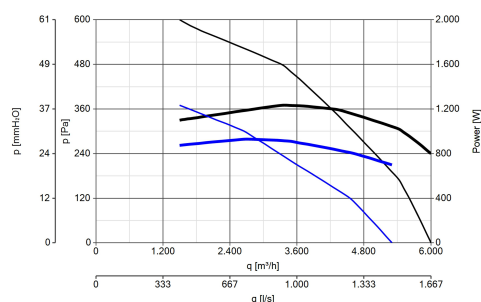

ACCESSORIES



TR-G 70/100
(GRIGLIA DI
PROTEZIONE)
Code 22506

TR-CU 70/100
(CONTROTELAIO
DI BASE U)
Code 22539

TR-CVT
(COMMUTATORE
VELOCITA'
TRIF.)
Code 22910

IRT 40
Code 12927

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com