Technical Data Sheet

CODE 30322

C 20/2 T E

Centrifugal fans

Certifications

CE

EAC

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0.54
Absorbed Power max (W)	330
Frequency (Hz)	50
Insulation Class	I°
Max ambient temperature for continuous operation (°C)	50
Motor IP protection	55
Number of Phases (Ph)	3
Number of Poles	2

Voltage (V)	400
Weight (Kg)	5.8
Delivery max (l/s)	222
Delivery max (m³/h)	800
Pressure max (mmH2O)	52.7
Pressure max (Pa)	517
RPM	2800
Sound Pressure level Lp [dB (A)] 3m	66.0

DIMENSIONS

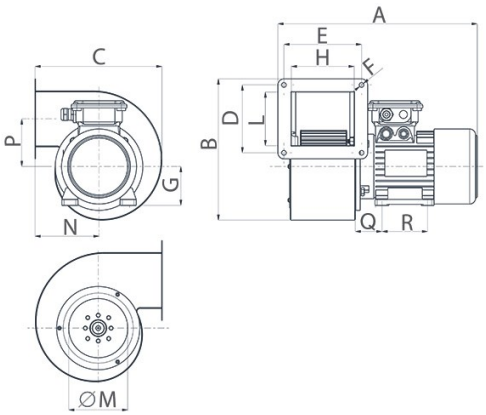

Dimensione Q (mm)	45
Dimensione R (mm)	90
Size A (mm)	350
Size B (mm)	258
Size C (mm)	232
Size D (mm)	123
Size E (mm)	123
Size F (mm)	8,5
Size G (mm)	71
Size H (mm)	102
Size L (mm)	98
Size M (mm)	ø 108
Size N (mm)	117
Size P (mm)	87

PER INFORMAZIONI:
Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 30322

C 20/2 T E

Centrifugal fans

DESCRIPTION

• Frame and scroll: painted pressed steel, with multiple fixing holes configured to allow alignment of the motor in 8 different positions relative to the outlet port.
• Three-phase AC motor with 1 operating speed and shaft turning in ball bearings.
• Centrifugal impeller with forward-curved blades of zinc-coated steel, dynamically balanced (UNI ISO 1940, Point 1 – Class 6.3).
• Maximum air flow: 244 m3/h.

CURVES

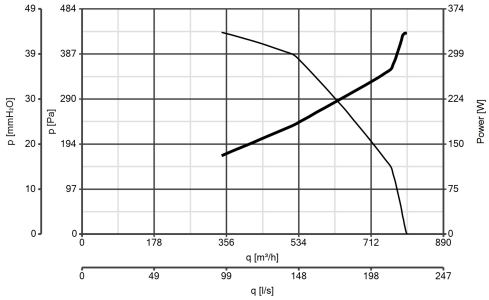

ACCESSORIES

C-MS 20/25 (SUPPORTO MOTORE)
Code 22836



C-RA 20-25 (RACCORDO DI ASPIRAZIONE)
Code 22828

C-GM 20 (GRIGLIA PROT.MANDATA)
Code 22813

C-GA 20/25 (GRIGLIA PROT.ASPIRAZIONE)
Code 22803

IREM INVERTER 4 M
Code 12815

IRET INVERTER 2,5 M
Code 12816

PER INFORMAZIONI:
Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com