

Technical Data Sheet

CODE 30323

C 25/2 M E

Centrifugal fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	1.7	Voltage (V)	230
Absorbed Power max (W)	390	Weight (Kg)	6,8
Frequency (Hz)	50	Delivery max (l/s)	265
Insulation Class	I°	Delivery max (m³/h)	955
Max ambient temperature for continuous operation (°C)	50	Pressure max (mmH2O)	59.5
Motor IP protection	55	Pressure max (Pa)	584
Number of Phases (Ph)	1	RPM	2800
Number of Poles	2	Sound Pressure level Lp [dB (A)] 3m	66,5

DIMENSIONS

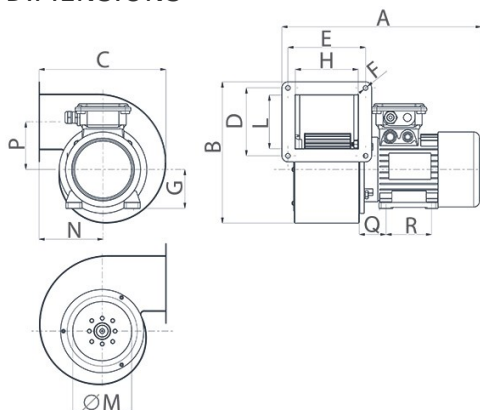

Dimensione Q (mm)	45
Dimensione R (mm)	90
Size A (mm)	369
Size B (mm)	258
Size C (mm)	232
Size D (mm)	124
Size E (mm)	142
Size F (mm)	8,5
Size G (mm)	71
Size H (mm)	115
Size L (mm)	98
Size M (mm)	Ø 108
Size N (mm)	117
Size P (mm)	87

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 30323

C 25/2 M E


Centrifugal fans



DESCRIPTION

- Frame and scroll: painted pressed steel, with multiple fixing holes configured to allow alignment of the motor in 8 different positions relative to the outlet port.
- Single phase AC motor with 1 operating speed and shaft turning in ball bearings.
- Centrifugal impeller with forward-curved blades of zinc-coated steel, dynamically balanced (UNI ISO 1940, Point 1 – Class 6.3).
- Maximum air flow: 1000 m³/h.

CURVES

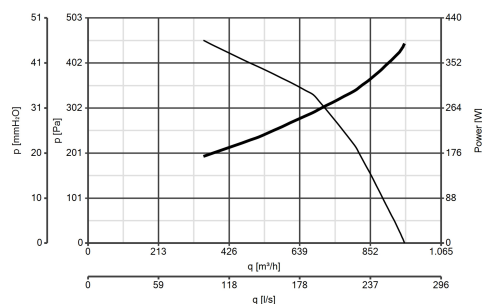


ACCESSORIES




C-MS 20/25 (SUPPORTO MOTORE)

Code 22836



C-RA 20-25 (RACCORDO DI ASPIRAZIONE)

Code 22828



C-GM 25 (GRIGLIA PROT.MANDATA)

Code 22814



C-GA 20/25 (GRIGLIA PROT.ASPIRAZIONE)

Code 22803



IREM INVERTER 4 M

Code 12815

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com